

# EVALUATION OF RESISTORS FOR TRANSIENT HIGH-VOLTAGE APPLICATIONS

J.M.Lehr, C.E. Baum, W.D.Prather and J.Hull  
Air Force Research Laboratory,  
Kirtland AFB, New Mexico 87117-5776

M.C.Skipper and M.D.Abdalla  
ASR Corporation, Federal Division  
Albuquerque, New Mexico

and  
D.V.Giri  
Pro-Tech, 1630 North Main Street, #377  
Walnut Creek, CA 94596-4609

## Abstract

Applications for transient, high-voltage pulsed power technologies are on the increase. High-voltage resistors are an essential component of such systems, especially in the proof-of-concept and prototype testing. We have recently procured and tested certain resistor samples, supplied by Kanthal Global and HVR Advanced Power Components. Results of a detailed evaluation of the HVR resistors are presented in this paper.

Two types of HVR high-powered resistors have been tested to determine hold-off voltage, frequency variation and resistance to high voltage. The resistors were tested in a coaxial geometry driven by a two stage Marx generator. The voltage and current were measured by calibrated sensors. The high-voltage pulse resistance of each resistor is then determined on a pulse by pulse basis by dividing the maximum voltage by the maximum current in the time-domain.

The two samples (HVR-10, HVR-12 ; washer type) were nominally 10 and 12 Ohms with resistivity of 28 and 80 Ohm-cm respectively. The variations in the low-voltage to pulsed high-voltage resistance were 9% for the HVR-10 and 18% for the HVR-12. With an average applied field of 65 kV/inch or 25.6 kV/cm, the resistors flashed in air, but not in pure SF6 and N2/SF6 mix. These resistors were found to be satisfactory for transient applications.

## I. CHARACTERIZATION OF HVR RESISTORS

The resistor samples are the washer type as shown in Figure 1. These resistors are also available in the disc type without the hole in the center. The quoted tolerances are 5, 10 and 20%. Standard metallised contacts are aluminum, although brass, silver, copper and nickel are possible. The resistors can be chamfered or left

with square edges for enhanced high-voltage performance [1]. The

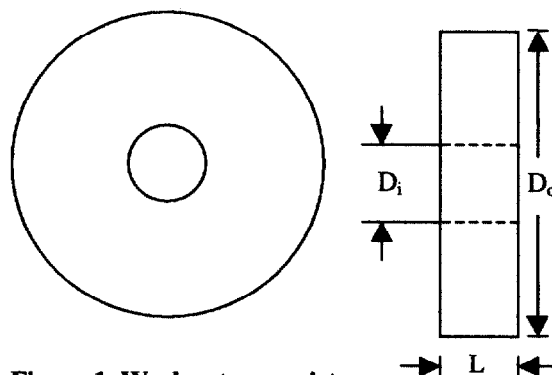


Figure 1. Washer type resistors

resistivity  $\rho$  and the conductivity,  $\sigma$  are given by

$$\rho = \frac{R}{L} \frac{\pi}{4} (D_o^2 - D_i^2) \quad (\Omega - m) \quad (1)$$

$$\sigma = \left( \frac{1}{\rho} \right) \quad \left( \frac{S}{m} \right) \quad (2)$$

Given the relative dielectric constant  $\epsilon_r$  of the ceramic material, the relaxation time  $t_r$  can be estimated as

$$t_r = \frac{\epsilon}{\sigma} = \epsilon_0 \epsilon_r \rho \quad (3)$$

and the skin depth  $\delta_s$  into the resistor can also be estimated using

$$\delta_s = \sqrt{\frac{2}{\omega \mu_0 \sigma}} = \sqrt{\frac{\rho}{\pi f \mu_0}} \quad (4)$$

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>JUN 1999</b>		2. REPORT TYPE <b>N/A</b>		3. DATES COVERED <b>-</b>	
4. TITLE AND SUBTITLE <b>Evaluation Of Resistors For Transient High-Voltage Applications</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Air Force Research Laboratory, Kirtland AFB, New Mexico 87 117-5776</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release, distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>See also ADM002371. 2013 IEEE Pulsed Power Conference, Digest of Technical Papers 1976-2013, and Abstracts of the 2013 IEEE International Conference on Plasma Science. Held in San Francisco, CA on 16-21 June 2013. U.S. Government or Federal Purpose Rights License.</b>					
14. ABSTRACT <b>Applications for transient, high-voltage pulsed power [1]. The technologies are on the increase. High-voltage resistors are an essential component of such systems, especially in the proof-of-concept and prototype testing. We have recently procured and tested certain resistor samples, supplied by Kanthal Globar and HVR Advanced Power Components. Results of a detailed evaluation of the HVR resistors are presented in this paper. Two types of HVR high-powered resistors have been tested to determine hold-off voltage, frequency variation and resistance to high voltage. The resistors were tested in a coaxial geometry driven by a two stage h4arx generator. The voltage and current were measured by calibrated sensors. The high-voltage pulse resistance of each resistor is then determined on a pulse by pulse basis by dividing the maximum voltage by the maximum current in the time-domain. The two samples (HVR-10, HVR-12 ; washer type) were nominally 10 and 12 ohms with resistivity of 28 and 80 ohm-cm respectively. The variations in the lowvoltage to pulsed high-voltage resistance were 9% for the HVR-10 and 18% for the M-12. With an average applied field of 65 kV/inch or 25.6 kV/cm, the resistors flashed in air, but not in pure SF6 and N2/SF6 mix. These resistors were found to be satisfactory for transient applications.</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>SAR</b>	18. NUMBER OF PAGES <b>4</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			



where  $\mu_0$  is the free space permeability and has a value of  $4\pi \times 10^{-7} \text{ H/m}$  and  $f$  is the frequency. The parameters  $\rho$ ,  $t_r$  and  $\delta_s$  can all be optimally selected for a specific transient application.

## II. EXPERIMENTAL CONFIGURATION

The resistors were tested in a conical geometry driven by a 100 kV Marx generator. The Marx is composed of TDK 1.7 nF, 50 kV capacitors and (PI Model # 670 ) high-pressure switches. The Marx was specifically designed to have an erected capacitance of 3.4 nF and a series inductance of less than 100 nH. The Marx is a two stage design and is charged to 50 kV/stage with a Maxwell CCDS power supply. The 96 nH circuit series inductance limits the maximum voltage to approximately 70 kV.

The resistor voltage and current were measured using in-house manufactured sensors. The sensors were initially calibrated using a 30 kV/30 kA modulator. Calibration reference data were collected using a Tektronix P6015 voltage probe and a Pearson 110 current probe. Transfer functions were developed and used to correct the raw sensor data in the frequency domain. The voltage and current sensors have 17.2 MHz and 707 MHz transition frequencies respectively. These sensor spectral responses are verified using a 20 GHz Tektronix 11801 TDR equipment. The high-voltage pulse resistance of each resistor is then determined on a pulse by pulse basis by dividing the maximum voltage by the maximum current.

The test sequence for each resistor type is as follows:

- Measure the low-voltage resistance value with an HP Model 4262A LCR meter at 1 kHz;
- Measure the average high-voltage pulse resistance over 10 shots at approximately 60 kV in pure SF<sub>6</sub>;
- Perform the lifetime test in pure SF<sub>6</sub> at approximately 65 kV;
- Perform lifetime test in N<sub>2</sub>/SF<sub>6</sub> mixture at approximately 65 kV;
- Perform lifetime test in pure air at approximately 65 kV;
- Repeat high-voltage resistance measurement at approximately 65 kV in N<sub>2</sub>/SF<sub>6</sub> mixture
- Repeat low-voltage measurement

The results of the resistance value testing at low and high-voltages are summarized in Table 1.

**TABLE 1. Resistance Value Test Summary**

Quantity	HVR 12	HVR 10
Rated Resistance	12 Ohms	10 Ohms
Low-voltage Resistance	13.1 Ohms	10.0 Ohms
Pulsed high-voltage Resistance	14.3 Ohms	11.8 Ohms
Percent Deviation	9%	18%

Table 2 summarizes the results of the high-voltage lifetime tests.

**TABLE 2. High-Voltage Pulse Testing**

Gas environment	HVR 12	HVR 10
SF <sub>6</sub>	1,000	1,000
N <sub>2</sub> /SF <sub>6</sub>	1,000	1,000
Air	Flashed	Flashed

It is noted that with  $L = 1''$  and an applied voltage peak of 65 kV, the average field exposure is approximately 25.6 kV/cm.

The values in Table 2 are the number of shots each resistor was subjected to in the corresponding environment. The resistors were not tested to failure and each was performing well and with no long-term resistance change at the end of the tests. It should be noted that both of the resistors immediately flashed over at 65 kV in air. Each resistor was purposely flashed over approximately 10 times before being retested in the N<sub>2</sub>/SF<sub>6</sub> mixture. Both resistors resumed normal operations in the N<sub>2</sub>/SF<sub>6</sub> environment and no operational degradation was observed. A sample voltage and current measurement for both resistors are included in figures 2 and 3, recalling that the high-voltage resistance is considered as the ratio of voltage to current peaks.

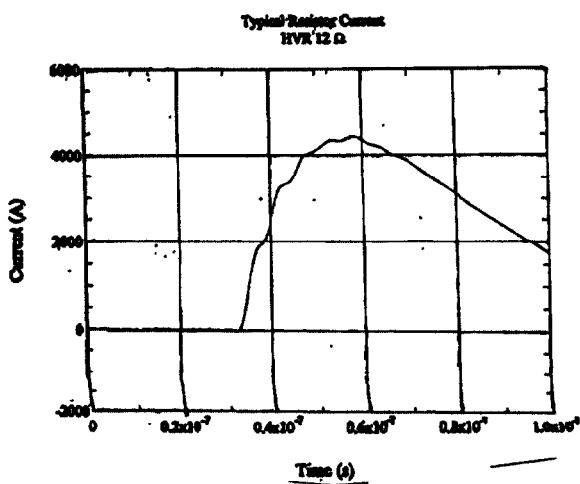
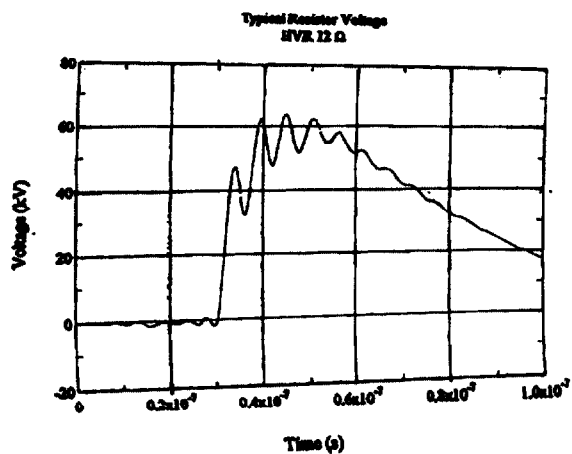


Figure 2. Voltage and current waveforms for HVR12

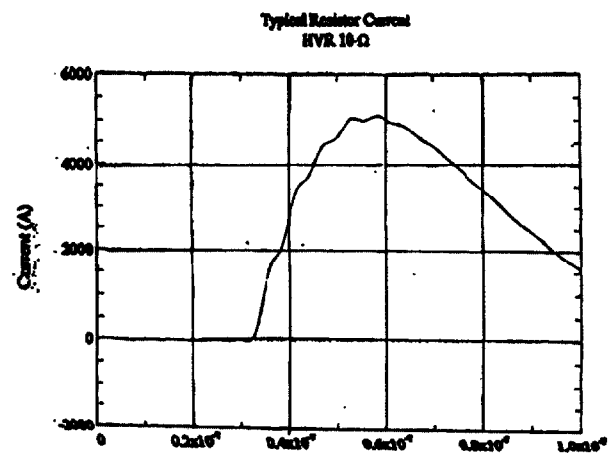
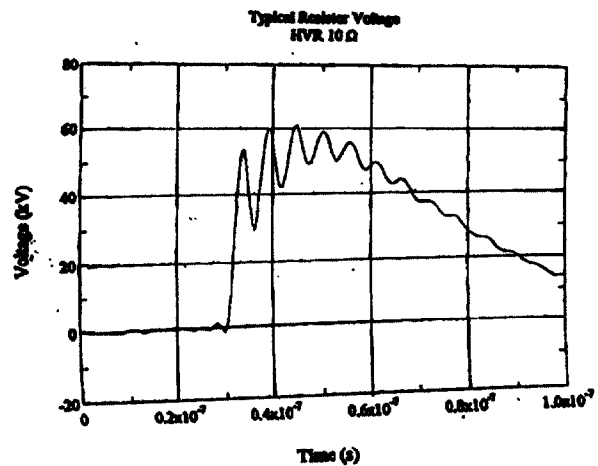


Figure 3. Voltage and current waveforms for HVR 10

### III. CAPACITANCE MEASUREMENTS

The two types of HVR high-power resistors have been tested to determine the capacitance of each. The capacitance was measured using an HP 8753C network analyzer with HP 85047A S-parameter set. Each resistor under test (RUT) is then attached to the end of the test cable using a specifically designed, low-inductance fixture, as shown in figure 4.

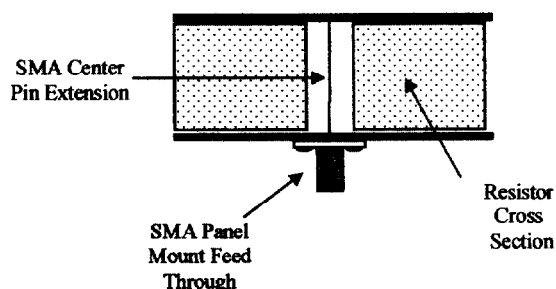


Figure 4. Test fixture for capacitance measurements. The upper and lower electrodes are circular aluminum plates.

The RUT is placed between the circular aluminum plates, which are then tightened against the resistor for good electrical contact using nylon screws (not shown). The SMA panel mount feed through is connected to Port 1 of the HP8753C with the test cable. Such an arrangement provides a low-inductance connection between the HP 8753C and the RUT. The reflection coefficient ( $\rho$ ) from the RUT is then measured as a function of the frequency using the S11 function of the HP 8753C. From this measurement, we calculate the magnitude of the resistor impedance ( $|Z_R|$ ). The resistor capacitance ( $C_R$ ) is then calculated as:

$$C_R = \frac{1}{\omega} \left[ \frac{1}{|Z_R|^2} - \frac{1}{R^2} \right]^{1/2} \quad (5)$$

Where  $R$  = the resistance of the RUT. Basically each resistor is represented as a parallel combination of  $R$  and  $C_R$ .  $R$  and  $C_R$  values for the two types of resistors were found to be 13.1 Ohms and 54.7 pF for the HVR 12, and 10.0 Ohms and 49.9 pF for the HVR 10 resistor. In transient applications, it is desirable to know the parallel capacitance of the resistors.

### IV. SUMMARY

The resistors have been tested with a ~65 kV, pulse that has a 1 ns rise and a 42 ns FWHM waveform. They have been tested in air, in (70/30) (N<sub>2</sub>/SF<sub>6</sub>) mixture and in pure SF<sub>6</sub>.

The HVR 10 resistor has  $D_0 = 32$  mm,  $D_i = 11$  mm,  $L = 25.4$  mm,  $\rho = 0.28$  (Ohm-m)  $\sigma = 3.57$  (S/m), and  $t_r = 12.38$  ps, with  $\epsilon_r = 5$ . The HVR 12 resistor had  $D_0 = 50$  mm,  $D_i = 19$  mm,  $L = 25.4$  mm,  $\rho = 0.8$  (Ohm-m)  $\sigma = 1.26$  (S/m), and  $t_r = 35$  ps, with  $\epsilon_r = 5$ .

The resistors have been tested with a ~65 kV, pulse that These resistors can be oil impregnated, chamfered and coated with anti-tracking material [2]. Previous testing in U.K., has indicated that square edges are better than chamfered edges for enhanced high-voltage performance. The coating was also found to be undesirable, and unnecessary, if the resistors are oil impregnated. The resistors were subjected to fields of the order of 25 kV/cm or 2.5 MV/m and withstood such fields in the gas mixture and in pure SF<sub>6</sub>, but not in air. They were not tested in an oil environment. The resistors are stackable by using an insulated tie-rod through the hole in the stack of washer type resistors. And are expected to be quite useful in a variety of transient applications.

### REFERENCES

- [1] A.K.Kidd et. al., "Solid Resistor Tests", Rutherford-Appleton Laboratory, in the United Kingdom, Private communication.
- [2] HVR Advanced Power Components, 2250 Military Road, Tonawanda, NY 14150 {Tel: (716) 693-4700}.